


Modbus Communication:




Optima 250, Design Panel SW 2.3 with MODBUS.

A Modbus network consists of one Master unit and one or more Slave units. The master controls the communication and requests information from the slave units. The rules for communication are set by the protocol. The Modbus protocol specification can be downloaded for free from the Modbus Organization. www.modbus.org

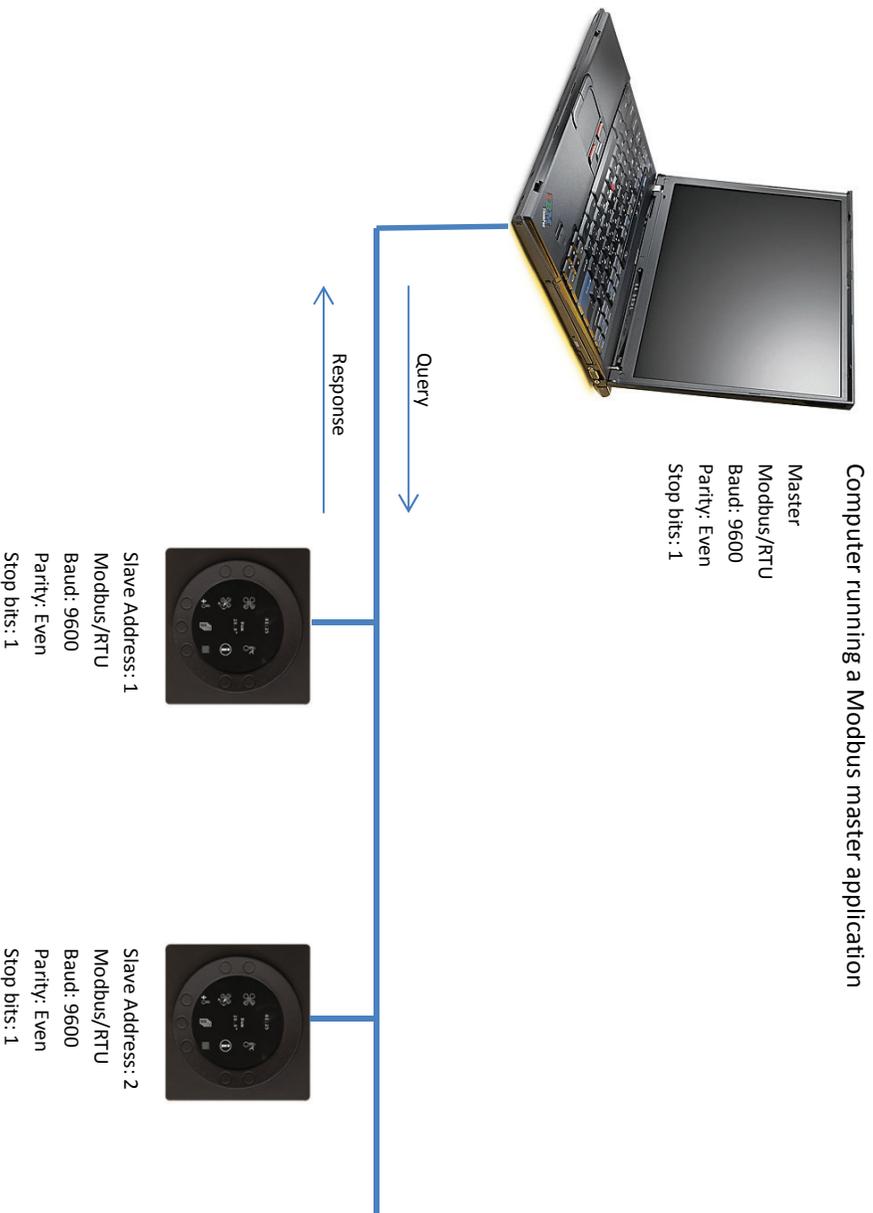

Connection.

Screened twisted pair cable should be used 2x2x0,25mm². The cable screen should be connected to the “Gnd” terminal. The cable should be terminated at each end with a 150 ohm resistor and “Daisy Chain” or “straight line” connection should be used. A “Star” or network with “Stubs (Tees)” is not recommended as reflection within the cable may result in data corruption.

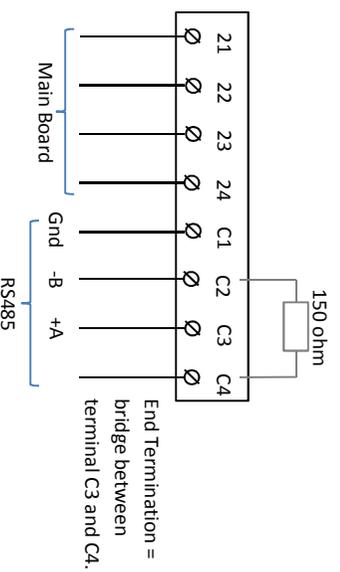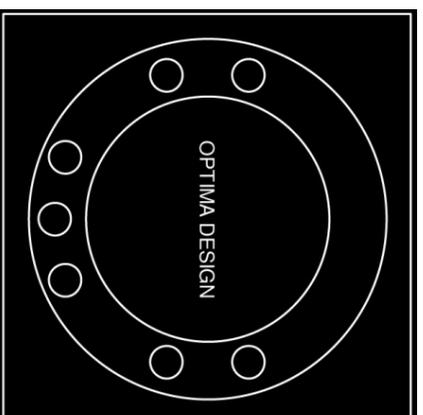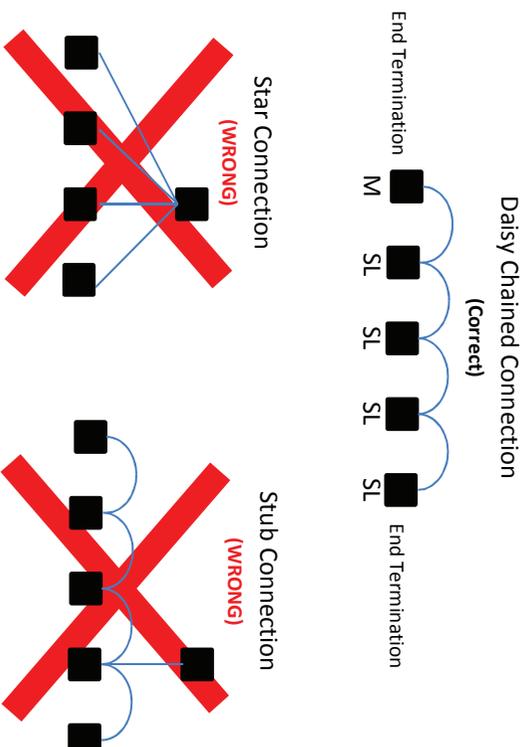

RS485 setup:

Standard:


Modbus application protocol specification V1.1b3 Modbus over serial line V1.02

| | | | |
|------------|-------------------------------|-------------|---|
| Mode: | RTU | (MSB first) | |
| Baud: | 0=Modbus off, 1=9600, 2=19200 | default | 0 |
| Start bits | 1 | fixed | |
| Data bits | 8 | fixed | |
| Stop bits | 1 | fixed | |
| Parity | Even | fixed | |
| Address | 1-247 | default | 1 |


Function:

| Code | Description | Description |
|------|------------------------|---|
| 01 | Read coils | Read the status off the coils (0X) |
| 02 | Read Discrete Inputs | Read the status off discrete inputs. (1X) |
| 03 | Read Holding Registers | Read the contents of read/write location (4X) |
| 04 | Read Input Registers | Read the contents of read only location (3X) |
| 06 | Write Single Register | Used to write a single holding register in a remote device. |

Switch MODBUS on in Display:

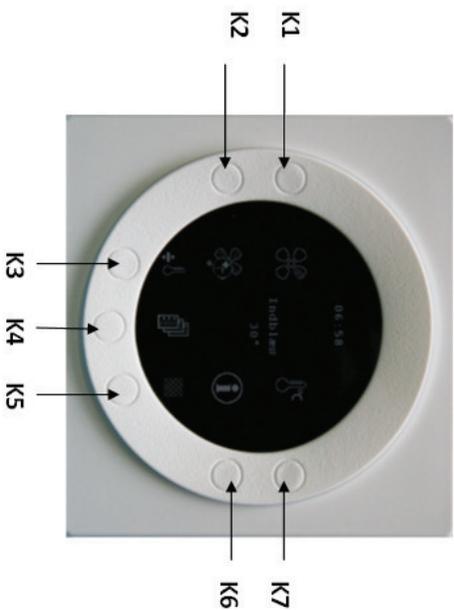

1. Press K4 to enter the main menu
2. Press K5 ("arrow up") choose service menu
3. Press K4 ("enter")
4. Press K5 until the arrow reaches menu point 30
5. Press K4 ("enter") choose mode
6. Press K3 ("-") or K5 ("+") to choose menu point

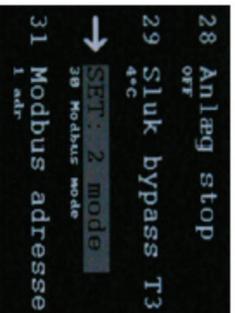

Menupunkt 30 = modbus mode

- 0 = modbus off (USB ON)
- 1 = 9600 baud (USB OFF)
- 2 = 19200 baud (USB OFF)
- *Factory set points: 0*

7. Press K4 ("enter") save the setting
8. Press K6 ("exit") back to the main menu
9. Press K6 ("exit")

Register:

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|------------------------|-----|------|--------|----------------|------------|--|--|--|--|--|--|
| 0x0000 | Relay 1 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0001 | Relay 2 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0002 | Relay 3 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0003 | Relay 4 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0004 | Relay 5 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0005 | Relay 6 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0006 | Relay 7 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0007 | Relay 8 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0008 | Relay 9 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0009 | Relay 10 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0010 | Relay 11 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0011 | Not Used Digital out 1 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0012 | Not Used Digital out 2 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0013 | Not Used Digital out 3 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 0x0014 | Not Used Digital out 4 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 1x0000 | Hygrostat | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 1x0001 | Start/stop | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 1x0002 | Not Used Digital in1 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 1x0003 | Not Used Digital in2 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 1x0004 | Not Used Digital in3 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| 1x0005 | Not Used Digital in4 | R | 1 | UINT16 | ON/OFF | 0=OFF 1=ON | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|------------------------------|-----|------|--------|----------------|------------------|--|--|--|--|--|--|
| 3x0000 | T1 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0001 | T2 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0002 | T3 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0003 | T4 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0004 | T5 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0005 | T6 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0006 | T7 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0007 | T8 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0008 | T9 | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0009 | T2 Panel | R | 1 | UINT16 | -30°C - 70°C | 300=0.0°C | | | | | | |
| 3x0010 | Not Used CO2 | R | 1 | UINT16 | 0-2000 ppm | | | | | | | |
| 3x0011 | Not Used Hum | R | 1 | UINT16 | 0-100% | | | | | | | |
| 3x0101 | Alarm | R | 1 | UINT16 | Bits | | | | | | | |
| 3x0102 | Inlet fan | R | | UINT16 | 0-100% | | | | | | | |
| 3x0103 | Extract fan | R | 1 | UINT16 | 0-100% | | | | | | | |
| 3x0104 | Bypass | R | 1 | UINT16 | 0-100% | | | | | | | |
| 3x0105 | Watervalve | R | 1 | UINT16 | 0-100% | | | | | | | |
| 3x0106 | Not Used volt1 | R | 1 | UINT16 | 0-1000 (0-10V) | 0-10V output | | | | | | |
| 3x0107 | Not Used volt2 | R | 1 | UINT16 | 0-1000 (0-10V) | 0-10V output | | | | | | |
| 3x0108 | Inlet fan RPM | R | 1 | UINT16 | 0-9999 | | | | | | | |
| 3x0109 | Extract fan RPM | R | 1 | UINT16 | 0-9999 | | | | | | | |
| 3x0200 | Programme Version Controller | R | 1 | UINT16 | 0-9999 | 1=0.1 | | | | | | |
| 3x0201 | Programme Version Display | R | 1 | UINT16 | 0-9999 | 1=0.1 | | | | | | |
| 3x0202 | Sub Version Controller | R | 1 | UINT16 | 0-9999 | ascii 97=a, 98=b | | | | | | |
| 3x0203 | Sub Version Display | R | 1 | UINT16 | 0-9999 | ascii 97=a, 98=b | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|--------------------------------------|-----|------|--------|----------------|------------------|------------|------------|---------------|-------------------|------------|------------------------|
| 3x0204 | ModbusVersion | R | 1 | UINT16 | 0-9999 | 1=0.1 | | | | | | |
| 3x0205 | Sub ModbusVersion | R | 1 | UINT16 | 0-9999 | ascii 97=a, 98=b | | | | | | |
| | | | | | | | | | | | | Display +offset |
| | | | | | | | Min | Max | Offset | Resolution | Min | Max |
| 4x0000 | 01) Temperature (°C) | R/W | 1 | UINT16 | | | 0 | 200 | 100 | 0,1 | 10,0 | 30,0 |
| 4x0001 | 02) Preheat (on/off) | R/W | 1 | UINT16 | | | 0 | 1 | 0 | 1 | 0 | 1 |
| 4x0002 | 03) Reheat (on/off) | R/W | 1 | UINT16 | | | 0 | 1 | 0 | 1 | 0 | 1 |
| 4x0003 | 04) Timer level 3-4 (on/off) | R/W | 1 | UINT16 | | | 0 | 1 | 0 | 1 | 0 | 1 |
| 4x0004 | 05) Filter change (mdr) | R/W | 1 | UINT16 | | | 0 | 6 | 0 | 1 | 0 | 6 |
| 4x0005 | | R/W | 2 | UINT16 | | | 0 | 0 | 0 | 1 | | |
| 4x0006 | 10) Level 1 supply (%) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 1 | 0 | 100 |
| 4x0007 | 11) Level 2 supply (%) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 1 | 0 | 100 |
| 4x0008 | 12) Level 3 supply (%) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 1 | 0 | 100 |
| 4x0009 | 13) Level 1 extract (%) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 1 | 0 | 100 |
| 4x0010 | 14) Level 2 extract (%) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 1 | 0 | 100 |
| 4x0011 | 15) Level 3 extract (%) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 1 | 0 | 100 |
| 4x0012 | 16) T2 adjustment (°C) | R/W | 1 | UINT16 | | | 0 | 50 | -50 | 0,1 | -5,0 | 0,0 |
| 4x0013 | 17) Level 3-4 (hour) | R/W | 1 | UINT16 | | | 1 | 9 | 0 | 1 | 1 | 9 |
| 4x0014 | 18) Filter change autostop (on/off) | R/W | 1 | UINT16 | | | 0 | 1 | 0 | 1 | 0 | 1 |
| 4x0015 | 19) Regform (0=Rum,1=indbl, 2=udsug) | R/W | 1 | UINT16 | | | 0 | 2 | 0 | 1 | 0 | 2 |
| 4x0016 | 20) Preheat Temperature (°C) | R/W | 1 | UINT16 | | | 0 | 150 | -150 | 0,1 | -15,0 | 0,0 |
| 4x0017 | 21) Bypass max (°C) | R/W | 1 | UINT16 | | | 10 | 100 | 0 | 0,1 | 1,0 | 10,0 |
| 4x0018 | 22) Water reg interval (sec) | R/W | 1 | UINT16 | | | 1 | 250 | 0 | 1 | 1 | 250 |
| 4x0019 | 23) Power reg interval (min) | R/W | 1 | UINT16 | | | 1 | 30 | 0 | 1 | 1 | 30 |
| 4x0020 | 24) Frost reduction (°C) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 0,1 | 0,0 | 10,0 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | Min | Max | Offset | Resolution | Min | Max |
|-------------|--|-----|------|--------|----------------|-------------------------------|-----|-----|--------|------------|-----|------|
| 4x0021 | 25) Frost (on/off) | R/W | 1 | UINT16 | | | 0 | 1 | 0 | 1 | 0 | 1 |
| 4x0022 | 26) Frost Default (°C) | R/W | 1 | UINT16 | | | 0 | 100 | 0 | 0,1 | 0,0 | 10,0 |
| 4x0023 | 27) Aux. relay R9 | R/W | 1 | UINT16 | | | 0 | 5 | 0 | 1 | 0 | 5 |
| 4x0024 | 28) Stop unit (on/off) | R/W | 1 | UINT16 | | | 0 | 1 | 0 | 1 | 0 | 1 |
| 4x0025 | 29) End bypass at low fresh air (°C) | R/W | 1 | UINT16 | | | 0 | 20 | 0 | 1 | 0 | 20 |
| 4x0026 | 30) Modbus mode (0=OFF, 1=9600, 2=19200) | R/W | 1 | UINT16 | | 0=Modbus Off, 1=9600, 2=19200 | 0 | 2 | 0 | 1 | 0 | 2 |
| 4x0027 | 31) Modbus address | R/W | 1 | UINT16 | | | 1 | 247 | 0 | 1 | 1 | 247 |
| 4x0100 | Panel fan mode speed switch | R/W | 1 | UINT16 | 0-4 | 0=Off, 1=S1, 2=S2, 3=S3, 4=S4 | | | | | | |
| 4x0200 | Hour | R/W | | UINT16 | 0-23 | | | | | | | |
| 4x0201 | Minute | R/W | | UINT16 | 0-59 | | | | | | | |
| 4x0202 | Day | R/W | | UINT16 | 1-7 | | | | | | | |
| 4x0203 | Date | R/W | | UINT16 | 1-31 | | | | | | | |
| 4x0204 | Month | R/W | | UINT16 | 1-12 | | | | | | | |
| 4x0205 | Year | R/W | | UINT16 | 0-99 | 0= jahr 2000 | | | | | | |
| 4x0500 | 1 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0501 | 2 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0502 | 3 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0503 | 4 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0504 | 5 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0505 | 6 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|------------------------------------|-----|------|--------|----------------|-------------------|--|--|--|--|--|--|
| 4x0506 | 7 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0507 | 8 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0508 | 9 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0509 | 10 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0510 | 11 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0511 | 12 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0512 | 13 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0513 | 14 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0514 | 15 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0515 | 16 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0516 | 17 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0517 | 18 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0518 | 19 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0519 | 20 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0520 | 21 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0521 | 22 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|------------------------------------|-----|------|--------|----------------|-------------------|--|--|--|--|--|--|
| 4x0522 | 23 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0523 | 24 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0524 | 25 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0525 | 26 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0526 | 27 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0527 | 28 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0528 | 29 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0529 | 30 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0530 | 31 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0531 | 32 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0532 | 33 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0533 | 34 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0534 | 35 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0535 | 36 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0536 | 37 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0537 | 38 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|------------------------------------|-----|------|--------|----------------|-------------------|--|--|--|--|--|--|
| 4x0538 | 39 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0539 | 40 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0540 | 41 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0541 | 42 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0542 | 43 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0543 | 44 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0544 | 45 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0545 | 46 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0546 | 47 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0547 | 48 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0548 | 49 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0549 | 50 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0550 | 51 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0551 | 52 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0552 | 53 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0553 | 54 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|------------------------------------|-----|------|--------|----------------|-------------------|--|--|--|--|--|--|
| 4x0554 | 55 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0555 | 56 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0556 | 57 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0557 | 58 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0558 | 59 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0559 | 60 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0560 | 61 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0561 | 62 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0562 | 63 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0563 | 64 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0564 | 65 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0565 | 66 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0566 | 67 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0567 | 68 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0568 | 69 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |
| 4x0569 | 70 Calendar change merged hour+Min | R/W | 1 | UINT16 | | HB:Hour LB:Min | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|---|-----|------|--------|----------------|----------------------------|--|--|--|--|--|--|
| 4x0600 | 1 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0601 | 2 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0602 | 3 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0603 | 4 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0604 | 5 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0605 | 6 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0606 | 7 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0607 | 8 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0608 | 9 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0609 | 10 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0610 | 11 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0611 | 12 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0612 | 13 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0613 | 14 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0614 | 15 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0615 | 16 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|---|-----|------|--------|----------------|----------------------------|--|--|--|--|--|--|
| 4x0616 | 17 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0617 | 18 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0618 | 19 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0619 | 20 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0620 | 21 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0621 | 22 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0622 | 23 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0623 | 24 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0624 | 25 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0625 | 26 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0626 | 27 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0627 | 28 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0628 | 29 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0629 | 30 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0630 | 31 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0631 | 32 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|---|-----|------|--------|----------------|----------------------------|--|--|--|--|--|--|
| 4x0632 | 33 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0633 | 34 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0634 | 35 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0635 | 36 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0636 | 37 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0637 | 38 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0638 | 39 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0639 | 40 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0640 | 41 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0641 | 42 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0642 | 43 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0643 | 44 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0644 | 45 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0645 | 46 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0646 | 47 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0647 | 48 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|---|-----|------|--------|----------------|----------------------------|--|--|--|--|--|--|
| 4x0648 | 49 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0649 | 50 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0650 | 51 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0651 | 52 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0652 | 53 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0653 | 54 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0654 | 55 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0655 | 56 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0656 | 57 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0657 | 58 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0658 | 59 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0659 | 60 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0660 | 61 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0661 | 62 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0662 | 63 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0663 | 64 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |

| Register No | Data description | R/W | Size | Units | Valid response | Remarks | | | | | | |
|-------------|---|-----|------|--------|----------------|----------------------------|--|--|--|--|--|--|
| 4x0664 | 65 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0665 | 66 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0666 | 67 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0667 | 68 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0668 | 69 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |
| 4x0669 | 70 Calendar change merged Speed+Reduction | R/W | 1 | UINT16 | | HB: Speed LB: Reduction | | | | | | |

| Alarm bit | Description | Value |
|-----------|-------------------------------|-------|
| bit0 | External stop | 1 |
| bit1 | Main Filter | 2 |
| bit2 | High Pressure | 4 |
| bit3 | Frost | 8 |
| bit4 | CommError Panel -> Controller | 16 |
| bit5 | External Filter | 32 |
| bit6 | Fan Speed | 64 |
| bit7 | | 128 |
| bit8 | | 256 |
| bit9 | | 512 |
| bit10 | | 1024 |